


# SPECIFICATIONS

Model		U48-4		
Type of ROPS / OPG (Top Guard Level I)*		Canopy / Cab		
Type of tracks		Rubber / Steel		
Engine	Model		Kubota V2607-DI	
	Output (SAEJ 1995 gross)	HP (kW) / rpm	41.8 (31.2) / 2200	
	Output (SAEJ 1349 net)	HP (kW) / rpm	40.2 (30.0) / 2200	
	Displacement	cc	2615	
Dimensions	Overall length	mm	5330	
	Overall height	Canopy / Cab	mm	2550 / 2550
	Overall width	mm	1960	
	Min. ground clearance	mm	310	
	Pump capacity	ℓ/min	118.8	
Hydraulic system	Auxiliary hydraulic flow	Left / Right	ℓ/min	37 / 70
	Max. breakout force	Bucket / Arm	kgf	3360 / 2245
Drive system	Travel speed	Rubber Low / High	km/h	2.8 / 4.9
		Steel Low / High	km/h	2.6 / 4.6
	Max. traction force	Low speed	kgf	5440
	Tumbler distance	mm	1990	
	Crawler length	mm	2500	
	Shoe width	Rubber / Steel	mm	400
	Ground contact pressure	Rubber Canopy / Cab	kPa	26.9 / 27.4
		Steel Canopy / Cab	kPa	27.4 / 27.9
Swing system	Unit swing speed	rpm	9.3	
	Boom swing angle	Left / Right	degree	70 / 55
Blade	Dimensions	Width	mm	1960
		Height	mm	410
	Max. lift above ground	mm	440	
	Max. drop below ground	mm	410	
Hydraulic oil (Reservoir / System)		ℓ	45 / 79	
Fuel reservoir		ℓ	68	
Operating weight (Including operator's weight @ 75 kgs)	Rubber	kgs	4760 / 4850	
	Steel	kgs	4845 / 4935	

\* OPG (Top Guard Level I) in accordance with ISO10262 is equivalent in definition to FOPS (Falling Object Protective Structure). The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty information. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt for almost all applications.

# DIMENSIONS

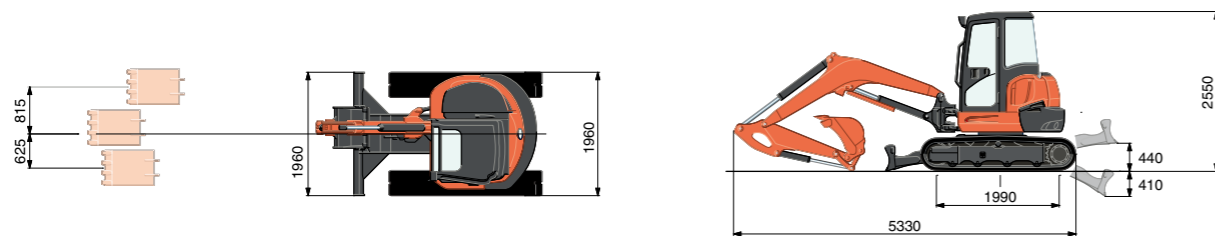

Unit: mm

©2019 Kubota Corporation



**Kubota Australia Pty Ltd**  
 25-29 Permas Way, Truganina VIC, 3029 Australia  
 Freecall: 1800-334-653  
 Email: sales@kubota.com.au  
 Web Site: <http://www.kubota.com.au>

**Kubota New Zealand Limited**  
 Freecall: 0800-582-682  
 Email: sales@kubota.com.au  
 Web Site: <http://www.kubota.co.nz>

**Kubota Genuine Parts**  
 for maximum performance, durability and safety



For Earth, For Life  
**Kubota**

# KUBOTA COMPACT EXCAVATOR

# U


# U48-4

Superior 4.8-tonne tight tail swing excavator with the power and flexibility to work wonders in narrow spaces.



\*This information is sourced from overseas and may not necessarily apply locally. It is essential that you confirm specifications and other information with your local Kubota dealer.





**Set to redefine the entire 5.5-tonne class, this Kubota compact excavator with a deluxe cab puts you in luxury and on top of almost any challenge.**

**DELUXE INTERIOR**



**SUPERIOR PERFORMANCE**



**MAINTENANCE & SAFETY**



**NEW DIGITAL PANEL**





# DELUXE INTERIOR

On the U48-4, your comfort truly comes first. The luxurious cab features a wider entrance, generous legroom and a deluxe seat. The Roll-over Protective Structure (ROPS) and Operator Protective Guard\* (OPG, top guard level I) maximize safety. Operability is greatly enhanced with more easy-to-use features than ever before.

\* OPG (top guard level I) in accordance with ISO10262 is equivalent in definition to FOPS (Falling Object Protective Structure)



## A. Deluxe Suspension Seat

Designed and engineered to fit better and to keep you working longer comfortably, Kubota's high-back suspension seat reduces strain and minimizes operator fatigue. It reclines to accommodate your individual posture, and offers weight compensation, firm arm rests and retractable seat belts.

## B. Wrist Rest

Thoughtfully designed wrist rests enhance operation and reduce operator fatigue.

## C. Cup Holder

With the convenience of a bigger cup holder, you can quench your thirst and work longer without leaving the cab.

## D. 2-speed Travel Switch

By placing the 2-speed travel switch on the dozer lever, dozing operations can be done faster and easier.




## E. Air Conditioning

The overall air circulation in the cab has been improved, thanks to a stronger cooling/heating unit and the positioning of six vents around the operator to offer better all-round comfort.



## Easy-open Front Slide Window

Unlike many excavator windows, the front glass window of the U48-4 opens with ease. Just flip the latches on the window sides and slide it up. A gas-assist mechanism makes this action almost effortless.



## Wider Entrance

The U48-4 features a much wider door and more ample foot space, making it a breeze to get on and off the excavator.



## Mirrors

All-round visibility is greatly enhanced with the well-positioned side and rear view mirrors.

## TPSS

The Two-Pattern Selection System positioned under the seat allows the operator to shift control styles conveniently while seated. A simple turn of a switch is all it takes to select between the ISO pattern and the SAE backhoe pattern.



# SUPERIOR PERFORMANCE

Combining the power for demanding jobs and the versatility to work in any condition, the Kubota U48-4 is ready to take on most challenges. It's designed with excellent stability to work with a variety of attachments. Versatility is greatly enhanced with precise oil flow control for auxiliary circuits. With upgraded digging and lifting power, smoother travel performance and improved versatility, this Kubota truly has it all.

## Kubota Original Direct Injection Engine

The U48-4 is powered by Kubota's impressive 41.8 HP direct injection engine. Engineered with the power to maximise digging and lifting performance, it also delivers minimised noise, vibration and fuel consumption.



## Adjustable Maximum Oil Flow Control For Auxiliary Circuits 1 & 2

The maximum oil flow settings of both circuits are conveniently adjustable from the digital panel – no additional tools or complex manual adjusting procedures are necessary. You can even program up to five oil flow rates corresponding to specific attachments into memory on the digital panel.



Right-hand Lever



Left-hand Lever

## Load Sensing Hydraulic System

Kubota's improved 1-pump load sensing hydraulic system ensures smoother operation, regardless of load size. It allows hydraulic oil to flow according to the specific range of the operator's lever motion. The result is greater fuel economy and smoother travelling.

## Auto-shift

The auto-shift system enables automatic travel shift from high to low depending on traction effort and terrain. This gives smoother simultaneous operations when dozing and turning.



## Enhanced Digging Force

The U48-4 delivers an impressive bucket digging force of 3,360 kgf. Its powerful and well-balanced arm and bucket allow the operator to dig faster and more efficiently even in the toughest conditions.

## Tight Tail Swing

With its counterweight protruding a mere 10 mm, this tight tail swing model proves to be highly versatile when undertaking operations wherever space is confined.

## Increased Boom Lifting Capacity

The U48-4 features a significantly improved boom lifting capacity.

## Increased Travel Speed

Featuring increased maximum high and low travel speeds of 4.9 km/h and 2.8 km/h respectively, the U48-4 truly takes productivity to new heights.

## Increased Traction Force

The traction, when operating in low speed, has been increased to 5,440 kgf. This helps ensure an efficient and productive day on the job.

## Float Position

The float function is a standard feature on the U48-4. Ground finishing work can be completed quickly without the need to adjust the dozer height. Simply travel backwards with the dozer in the float position.






## One-sided Engine Maintenance

Kubota has made routine maintenance extremely simple by consolidating primary engine components onto one side for easier access. Engine and other vital components can be inspected quickly and easily.

- A. Dual Element Air Cleaner**
- B. Water Separator**
- C. Fuel Filter**
- D. Starter Motor**
- E. Alternator**

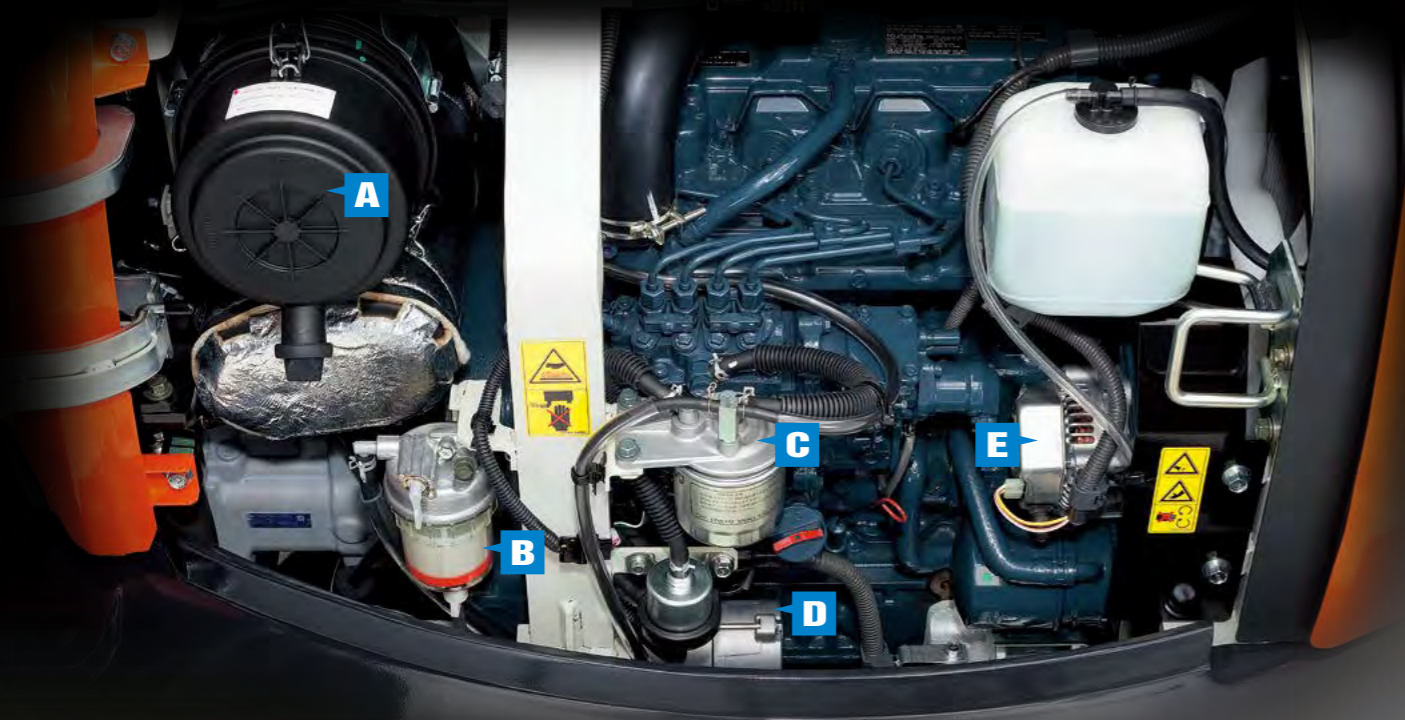

### Steel Panels

The U48-4 features long-lasting side panels that open easily for quick inspection and routine maintenance. The panels are located inside the counterweight edge for protection and durability.

### Parking Brake

A travel negative brake comes as a standard safety feature on the U48-4 for added peace of mind during transportation or parking on hilly areas.

### Grease Gun Holder

A convenient space within the side bonnet is designed to keep the grease gun handy for daily servicing.



### Pre Cleaner

The built-in pre cleaner will help protect the engine during extremely dirty or dusty operations.

### Tool Box

A large tool box is positioned within the side bonnet so necessary tools for small checkups are always within easy reach.



### Refuelling

When refuelling, simply press the refuelling signal button to monitor the progress. The beeping signal accelerates as the fuel approaches full and thus avoiding spillage.



# MAINTENANCE & SAFETY

Although your Kubota excavator is state-of-the-art, its maintenance doesn't get much easier. Thanks to the full-opening rear and right side bonnets, engine, control valves and various components are accessible for easy inspection and repair.






# NEW DIGITAL PANEL

Following the excellence of Kubota's Intelligent Control System, the new digital panel puts convenience at the operator's fingertips. Featuring easier button operation, the user-friendly digital panel is positioned to the front right corner of the operator. This operator-facing wider display greatly improves visibility. With easier access, simpler settings, easy-to-read indicators and alerts, you'll always be aware of the excavator's functioning status.

## Operation History Record

Operation history is automatically recorded on the U48-4. You can trace back up to 90 days of the machine's usage dates by simply checking the built-in calendar.



Service Mode



Warning Mode



Operation History Record



Max. Oil Flow Setting (AUX1 and AUX2)

## Convenient Pre-installed Attachment Icons



AUX (Standard)



Tilt Bucket



Breaker



Clamshell



Auger



Grapple



Rotary Grapple



Brush Cutter

# U48-4 OPTIONS

## STANDARD EQUIPMENT

### Safety system

- Engine start safety system
- Travel motor with disc brake
- Swivel motor with disc brake
- All hydraulic control

### Working equipment

- Auxiliary circuits 1 and 2
- 2 working lights on cab and 1 light on the boom
- Canopy lights
- Travel alarm
- Float blade

### Operator's space

- ROPS/OPG (Top Guard Level I) canopy and cab
- Weight-adjustable full suspension seat
- Retractable seat belt
- Hydraulic pilot control levers with arm rests
- Travel levers with foot pedals

- Two pattern selection system
- Digital panel
- 12V power source
- Cup holder
- Horn

### Engine/Fuel system

- Double element air filter
- Auto idling system
- Water separator with drain cock

### Undercarriage

- 400 mm rubber track
- 1 × upper track roller
- 4 double-flange track rollers on each side
- 2-speed travel switch on dozer lever
- 2-speed travel with auto-shift

### Hydraulic system

- Pressure accumulator
- Hydraulic pressure checking ports
- Straight travel circuit

- Third line hydraulic return
- 1-pump load sensing system
- Adjustable maximum oil flow on auxiliary hydraulic circuits 1 and 2

### Others


- Tool box
- Grease gun holder
- Pre-cleaner

## OPTIONAL EQUIPMENT

- Cab with A/C
- Rear working lights
- Beacon lights

## WORKING RANGE

Model		U48-4
A	Max. digging height	mm 5440
B	Max. dumping height	mm 3770
C	Max. digging depth	mm 3380
D	Max. vertical digging depth	mm 2670
E	Max. digging radius at ground	mm 5710
F	Max. digging radius	mm 5850
G	Min. turning radius	W/O swing mm 2390
		W swing mm 1960
H	Min. tail turning radius	mm 990

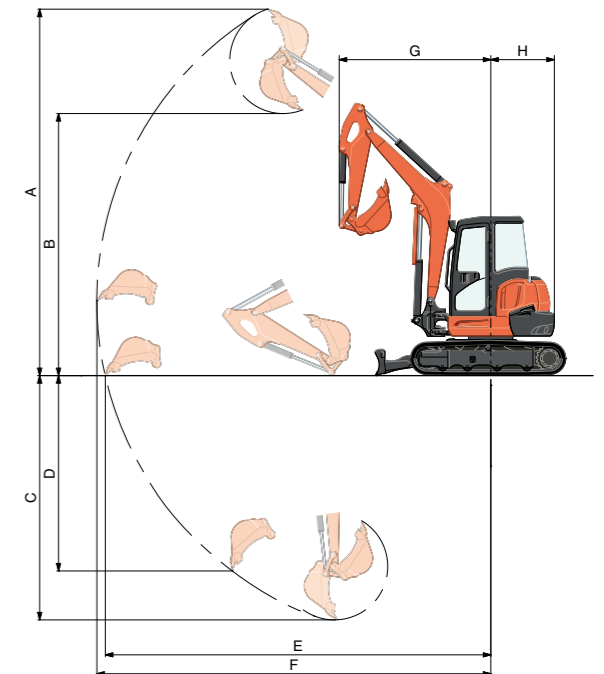

## LIFTING CAPACITY

LIFT POINT HEIGHT (m)	LIFTING CAPACITY OVER-FRONT BLADE DOWN unit = kg			LIFTING CAPACITY OVER-SIDE unit = kg		
	LIFT POINT RADIUS (m)			LIFT POINT RADIUS (m)		
	3	4	MAX	3	4	MAX
3	—	790	810	—	640	500
2	1190	910	820	960	610	430
1	1610	1070	850	880	580	410
GL	0	1750	1150	840	560	430

Machine with canopy and rubber crawler, without bucket

