



Volvo Construction Equipment

EC250D, EC300D

Volvo Excavators 24.5-33.4 t 204-228 hp



POWERFUL PERFORMANCE.



Increased power
Experience increased power and digging force as well as faster cycle times for greater productivity. Compared to the previous model, hydraulic pump flow has improved by 5% while digging force, swing torque and tractive force have increased by 3-5%. In the EC300D, engine power has increased by 11%.

Operate with increased power and digging force in Volvo's EC250D and EC300D. With faster cycle times and greater productivity, these machines will help you to get the job done faster. Whether you work in the quarry, road construction, site preparation or any other application, you'll experience high performance from these powerful machines.



Improved structure

For maximum durability and reliability, the boom and arm have been reinforced in critical areas to equally distribute mechanical stresses and handle the increased working power of these machines.



Improved controllability
Both grading and combined operations have been improved thanks to Volvo's smart hydraulic system which increases controllability. Benefit from smoother and easier movement when traveling and lifting simultaneously as well as better grading quality from the harmonized boom and arm movement.

SAVE FUEL WITH VOLVO.

If you're looking for a fuel efficient and productive machine that will increase your competitive edge look no further than Volvo's latest offering. With proven, advanced technology the EC250D and EC300D offer customers a 7% - 10% increase in fuel efficiency compared to the previous model. Increase production, reduce fuel consumption and reach new levels of efficiency with Volvo.

Volvo D7 engine

Volvo's state-of-the art D7 diesel engine is seamlessly integrated with all excavator systems. The premium, six cylinder engine delivers high performance and low fuel consumption. The D7 is available in two versions to comply with regional emission regulations.



Auto engine shutdown

The optional auto engine shutdown function automatically turns the engine off to reduce fuel consumption when the machine is inactive for a preset amount of time (five minutes is the default setting). The operator is informed one minute before this occurs.



Fuel consumption display

A new gauge bar on the i-ECU measures instantaneous fuel consumption while average fuel consumption is displayed numerically per hour. This allows you to monitor fuel usage on different job sites and applications.

Work modes

Volvo's unique, integrated work mode system now includes the G4 mode for optimum fuel efficiency and machine performance. Operators can choose the best work mode to suit the task at hand – simply select from I (Idle), F (Fine), G (General), H (Heavy) and P (Power max) mode.



ECO mode

Volvo's unique ECO mode contributes to up to 5% of the machine's total improved fuel efficiency – without any loss of performance in most operating conditions. The design features electronic pump control technology which reduces flow and pressure losses while maintaining digging power and maximizing swing torque.

THE VOLVO EXPERIENCE.



Cab

All-around visibility and an excellent operator environment are at the center of Volvo's cab design. The EC250D and EC300D feature new Volvo styling. The spacious and safe environment has been built strong and includes slim cab pillars, large expanses of glass, an adjustable seat and easy to access controls for reduced fatigue and increased productivity.

At Volvo we know that when operators are comfortable they experience less fatigue and work more productively. That's why the new, modern styling of the D-series cab provides superior visibility, a safe and spacious working environment and easy to access controls – right where you'd want them. Trust Volvo to think of everything and increase your productivity.

I-ECU monitor

The new, color LCD monitor displays machine status information including fuel consumption details and service interval alerts. The large, anti-glare, tiltable screen and conveniently placed navigation controls facilitate easy operation and high productivity.



ROPS

Volvo recommends an optional Roll Over Protective Structure (ROPS) certified cab when working in challenging applications. This provides increased operator safety in the unlikely event of machine roll over.

Climate control system


Operators can set their ideal temperature with Volvo's powerful climate control system which is integrated into the I-ECU. Industry-leading air circulation and defrosting is delivered quickly via 14 well-spaced vents for increased comfort and productivity.

STRAIGHTFORWARD SERVICING.

With built in serviceability, the EC250D and EC300D help you to get the most out of each working day. Volvo engineers have designed these machines to make maintenance easy – with safe and easy access to centralized filters and grouped greasing points.

Cooling system

The radiator, charged air cooler and hydraulic oil cooler are situated side-by-side on a single layer to maximize efficiency, reduce blockages and aid cleaning. The system is easily accessed for maintenance by simply opening the side door from ground level.

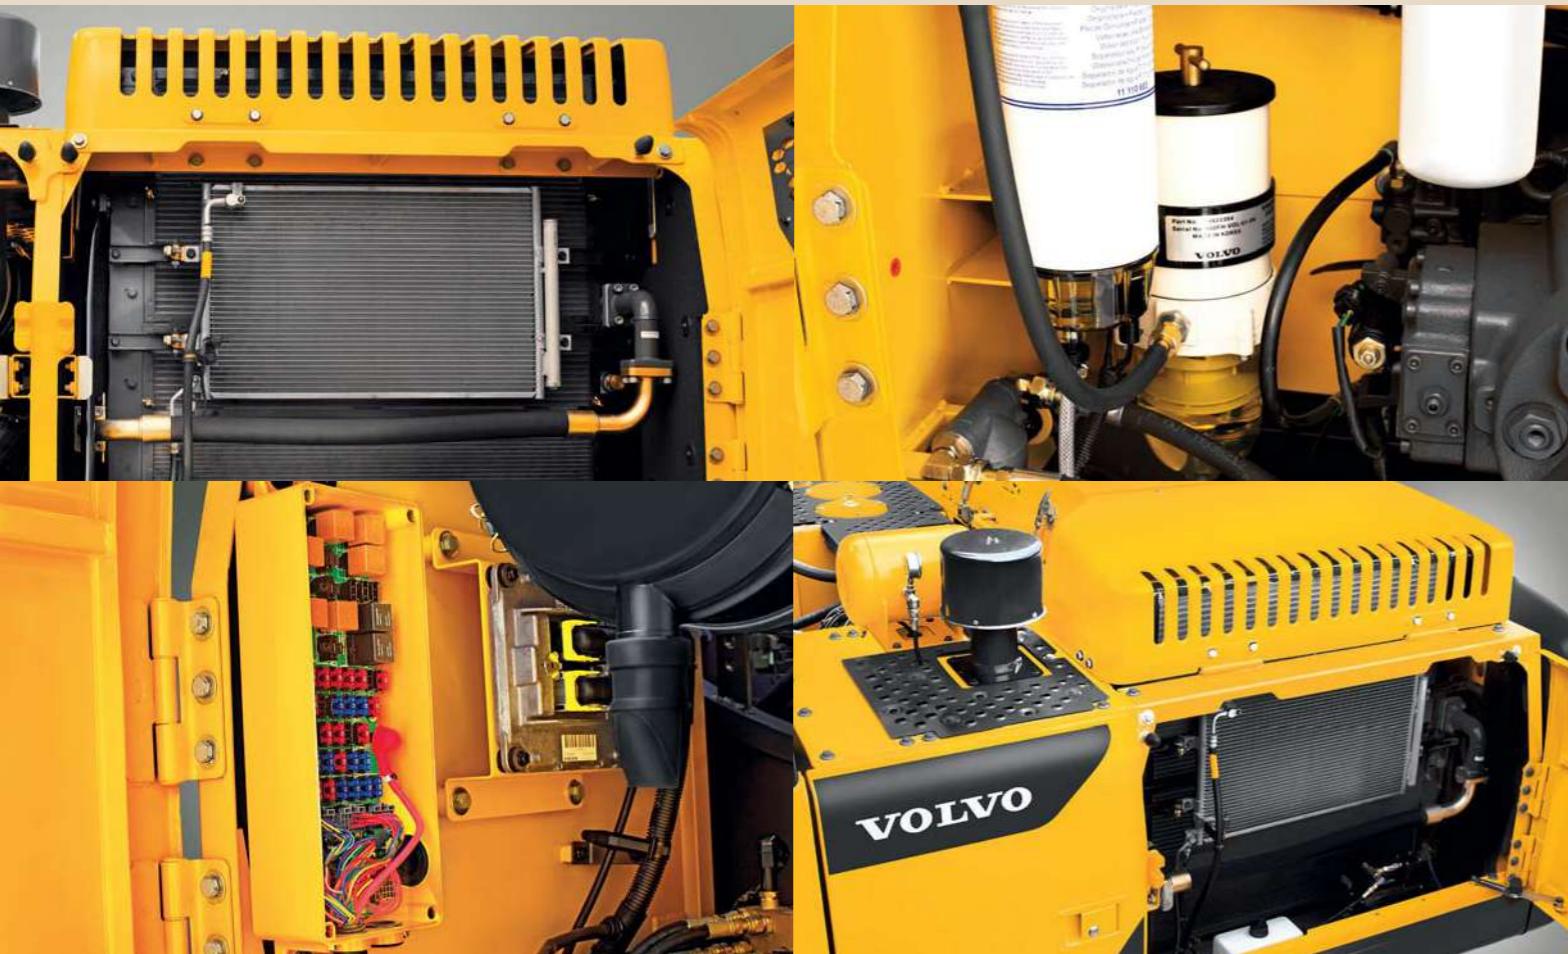

Electrical Distribution Box

The fully-sealed Electrical Distribution Box contains all fuses and relays – inside the box cover these are identified on a map. The Volvo design protects against dirt and moisture for more machine uptime. It is accessible from ground level for easy service access.

Air compressor

Particularly useful when working in dusty environments, this feature provides an air nozzle to clean inside the cab, as well as other areas, for operator comfort and easy maintenance.



Service access

Large doors and engine hood – which can be fully opened – provide easy service access to components. Centralized filters and greasing points allow regular checks to be done faster for maximum machine uptime and productivity. Durable, steel anti-slip plates ensure safe access for maintenance in more weather conditions and over time.

ADDING VALUE TO YOUR BUSINESS.

Being a Volvo customer means having a complete set of services at your fingertips. Volvo can offer you a long-term partnership, protect your revenue and provide a full range of customer solutions using high quality parts, delivered by passionate people. Volvo is committed to the positive return of your investment.



Complete Solutions

Volvo has the right solution for you. So why not let us provide all your needs throughout the whole life cycle of your

machine? By listening to your requirements, we can reduce your total cost of ownership and increase your revenue.



Genuine Volvo Parts

Our attention to detail is what makes us stand out. This proven concept acts as a solid investment in your machine's future. Parts are extensively tested and approved because every part is vital for uptime and performance. Only by using Genuine Volvo Parts, can you be sure that your machine retains the renowned Volvo quality.



Service Network

In order to respond to your needs faster, a Volvo expert is on their way to your job site from one of our Volvo facilities. With our extensive infrastructure of technicians, workshops and dealers, Volvo has a comprehensive network to fully support you using local knowledge and global experience.



Customer Support Agreements

The range of Customer Support Agreements offer preventive maintenance, total repairs and a number of uptime services. Volvo uses the latest technology to monitor machine operation and status, giving you advice to increase your profitability. By having a Customer Support Agreement you are in control of your service costs.



GET THE MOST FROM YOUR EXCAVATOR.

Maximize your excavator's productivity and profitability with Volvo's comprehensive range of attachments
– designed to work in perfect harmony with Volvo machines. Access more applications and effectively perform a variety of tasks while experiencing reduced fuel consumption and reduced cycle times.



Volvo buckets

Volvo offers a range of high quality buckets designed to perform in a variety of materials. Featuring exceptional design and built in durability, Volvo buckets efficiently handle the toughest of jobs.

Hydraulic breakers

Volvo hydraulic breakers have been built to break the most demanding materials. With consistent power and high breaking force you'll benefit from maximum impact and durability. Set your Volvo breaker at the right frequency to suit your application needs.



INTERFACES



S1 and S2 quick couplers

Volvo's dedicated quick couplers are the ideal choice when you need high performance as well as the ability to easily switch between various attachments – including a tiltrotator. The lightweight design features a low build height and a tight fit to the attachment.



Universal quick coupler

For ultimate flexibility, the universal quick coupler picks up a wide range of both Volvo and other brand attachments. The coupler can be used with buckets in both the face shovel and backhoe position.



Direct fit

For maximum productivity when only operating in one application, Volvo's direct fit attachments provide the best performance and shortest tip radius.

BUCKETS & GROUND ENGAGING TOOLS



General purpose bucket

The perfect tool for digging and re-handling soft to medium material such as dirt, sand and loose clay soils.



Heavy-duty bucket

This bucket excels at digging compact materials including loose rock, hard clay and gravel. It can be used in applications such as quarrying or mining.



Fixed ditching bucket

Ideal for ditch cleaning, grading, contouring, landscaping, backfilling and removing soft materials.



Tiltable ditching bucket

This bucket can be tilted 45° to each side making it ideal for use on slopes. It can be used for ditch cleaning, grading, contouring, landscaping, backfilling and removing soft materials.



Wear parts


For increased durability, Volvo provides segments, side shrouds, bottom shrouds, teeth, side cutters and bolt-on edges.

HYDRAULIC BREAKERS



Breaker package

The all-in-one hydraulic breaker package includes everything you need to start using your breaker. Depending on the machine, it contains a breaker, hydraulic hoses, a breaker bracket and tool.

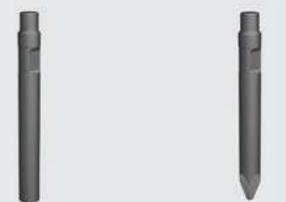

Breaker Tools

Volvo hydraulic breakers can be used in a variety of applications. To ensure optimum performance in your application select the right breaker tool from the range.

FULL OF QUALITY FEATURES.



Customer solutions

Volvo provides the right solutions throughout the entire life cycle of your machine to lower total cost of ownership.

Boom float

This option enables the boom to 'float' over the ground for easy controllability in grading and breaker operations.



Improved structure

The boom and arm have been reinforced in critical areas to handle the increased working power of these machines.

New work modes

Volvo's unique work mode system now includes the G4 mode for optimum fuel efficiency and performance.



Increased power

Benefit from increased power, digging force and faster cycle times for more productivity.

Electro-hydraulic system

New electro-hydraulic system and MCV use intelligent technology to control on-demand flow for improved performance and efficiency.



Service access

Large doors and engine hood provide easy service access. Centralized filters and greasing points allow regular checks to be done faster.



New D-series styling

The EC250D and EC300D boast new, modern D-series styling consistent with Volvo's product family.



ECO mode

Volvo's unique ECO mode contributes to up to 5% of the machine's total improved fuel efficiency without any loss of performance.



Cab design

All-around visibility, safety, comfort and easy to access controls are at the center of Volvo's operator environment.

Engine D7

Premium Volvo D7 diesel engine built with proven, advanced technology for high performance and low fuel consumption.

Optional track guard

When working in harsh environments, heavy-duty, bolt-on, full track roller guards protect the bottom rollers and links from debris.

VOLVO EC250D, EC300D IN DETAIL.

	EC250D	EC300D	
Engine			
The engine, which provide excellent performance, is equipped with six cylinder, vertical, electronic-controlled high pressure fuel injectors, internal EGR* (*for certain regions), 7 liter in-line waste gate turbo charger, air-to-air intercooler and water cooled diesel engine type.			
Engine	Volvo D7	D7	
Max power at	r/s / r/min	30 / 1 800	30 / 1 800
Net, ISO 9249/ SAE J1349	kW / hp	133 / 181	162 / 220
Gross, ISO 14396/ SAE J1995	kW / hp	138 / 188	170 / 231
Max torque at	Nm / r/min	870 / 1 350	1 080 / 1 350
No. of cylinders		6	6
Displacement	l	7.1	7.1
Bore	mm	108	108
Stroke	mm	130	130
Electrical system			
High-capacity electrical system that is well protected. Waterproof double-lock harness plugs are used to secure corrosion-free connections. The main relays and solenoid valves are shielded to prevent damage. The master switch is standard. Advanced monitoring of machine functions and important diagnostic information is displayed on the I-ECU.			
Voltage	V	24	24
Battery capacity	V / Ah	2 x 12 / 200	2 x 12 / 200
Alternator	V / Ah	28 / 80	28 / 80
Start motor	V / kW	24 / 5.5	24 / 5.5
Swing system			
The swing system uses an axial piston motors, driving a planetary gearbox for maximum torque. An automatic holding brake and anti-rebound valve are standard.			
Max. slew speed	r/min	11.9	10.7
Max. slew torque	kNm	91.6	110.9

	EC250D	EC300D	
Drive			
Each track is powered by an automatic two-speed shift travel motor. The track brakes are multi-disc, spring-applied and hydraulic released. The travel motor, brake and planetary gears are well protected within the track frame.			
Max. travel speed (low / high)	km/h	3.5 / 5.5	3.4 / 5.4
Max. drawbar pull	kN	217	247
Gradeability	°	35	35
Undercarriage			
The undercarriage has a robust X-shaped frame. Greased and sealed track chains are standard.			
	EC250DL	EC300DL	
Track pads	2 x 51	2 x 50	
Link pitch	190	203	
Shoe width, triple grouser	600/700/ 800/900	600/700/ 800/900	
Shoe width, triple grouser (HD)	-	600	
Shoe width, double grouser	700	700	
Bottom rollers	2 x 9	2 x 9	
Top rollers	2 x 2	2 x 2	
	EC250DLR	EC300DLR	
Track pads	2 x 51	2 x 50	
Link pitch	190	203	
Shoe width, triple grouser	600/800/ 900	600/800/ 900	
Shoe width, triple grouser (HD)	-	600	
Shoe width, double grouser	700	-	
Bottom rollers	2 x 9	2 x 9	
Top rollers	2 x 2	2 x 2	

	EC250D	EC300D	
Hydraulic system			
The new electro-hydraulic system and new MCV (main control valve) use intelligent technology to control on-demand flow for high-productivity, high-digging capacity and excellent fuel economy. The summation system, boom, arm and swing priority along with boom, arm and bucket regeneration provides optimum performance. The following important functions are included in the system:			
Summation system: Combines the flow of both hydraulic pumps to ensure quick cycle times and high productivity.			
Boom priority: Gives priority to the boom operation for faster raising when loading or performing deep excavations.			
Arm priority: Gives priority to the arm operation for faster cycle times in leveling and for increased bucket filling when digging.			
Swing priority: Gives priority to swing functions for faster simultaneous operations.			
Regeneration system: Prevents cavitation and provides flow to other movements during simultaneous operations for maximum productivity.			
Power boost: All digging and lifting forces are increased.			
Holding valves: Boom and arm holding valves prevent the digging equipment from creeping.			
Main pump, Type 2 x variable displacement axial piston pumps			
Maximum flow	l/min	2 x 240	2 x 263
Pilot pump, Type Gear pump			
Maximum flow	l/min	1 x 18	1 x 18
Relief valve setting			
Implement	MPa	33.3/36.3	
Travel circuit	MPa	36.3	
Slew circuit	MPa	27.9	
Pilot circuit	MPa	3.9	
Hydraulic cylinders			
Mono boom		2	2
Bore x Stroke	ø x mm	135 x 1 345	140 x 1 480
2 piece boom		1	1
Bore x Stroke	ø x mm	160 x 1 230	170 x 1 300
Arm		1	1
Bore x Stroke	ø x mm	140 x 1 665	150 x 1 745
Bucket		1	1
Bore x Stroke	ø x mm	130 x 1 150	140 x 1 140
Bucket for long reach		1	1
Bore x Stroke	ø x mm	100 x 865	100 x 865

	EC250D	EC300D	
Service refill capacities			
Fuel tank			
Fuel tank	l	470	470
Hydraulic system, total	l	400	400
Hydraulic tank	l	195	195
Engine oil	l	32	32
Engine coolant	l	41	41
Swing reduction unit	l	5.9	6
Travel reduction unit	l	2 x 5.0	2 x 6.8
Cab			
The operator's cab has easy access via a wide door opening. The cab is supported on hydraulic dampening mounts to reduce shock and vibration levels. These along with sound absorbing lining provide low noise levels. The cab has excellent all-round visibility. The front windshield can easily slide up into the ceiling, and the lower front glass can be removed and stored in the side door.			
Integrated air-conditioning and heating system: The pressurized and filtered cab air is supplied by an automatically-controlled fan. The air is distributed throughout the cab from 14 vents.			
Ergonomic operator's seat: The adjustable seat and joystick console move independently to accommodate the operator. The seat has nine different adjustments plus a seat belt for the operator's comfort and safety.			
Sound Level			
Sound level in cab according to ISO 6396			
LpA	dB(A)	71	
External sound level according to ISO 6395 and EU Noise Directive (2000/14/EC) and 474-1:2006 +A1:2009			
LwA	dB(A)	104	105

SPECIFICATIONS.

DIMENSIONS

Boom		Arm											
Description	Unit	2 piece	Long reach	Description	Unit				Long reach				
Boom	m	6.0	5.95	10.2	Arm	m	2.5	2.97	3.6				
Length (A)	mm	6 210	6 160	10 410	Length (A)	mm	3 590	4 060	4 730				
Height (B)	mm	1 630	1 100	1 525	Height (B)	mm	1 000	1 000	1 000				
Width	mm	740	740	740	Width	mm	500	500	500				
Weight	kg	2 360	2 840	3 010	Weight	kg	1 360	1 430	1 470				
EC250D													
Description	Unit	2	piece	Long	reach	Description	Unit		Long				
Boom	m	6.0	5.95	10.2	Arm	m	2.5	2.97	3.6				
Length (A)	mm	6 210	6 160	10 410	Length (A)	mm	3 590	4 060	4 730				
Height (B)	mm	1 630	1 100	1 525	Height (B)	mm	1 000	1 000	1 000				
Width	mm	740	740	740	Width	mm	500	500	500				
Weight	kg	2 360	2 840	3 010	Weight	kg	1 360	1 430	1 470				
EC300D													
Description	Unit	X	D	2	piece	Long	reach	Description	Unit	X	D	Long	reach
Boom	m	6.2	6.2	6.2	10.2	Arm	m	2.55	2.75	3.05	3.05	3.7	7.9
Length (A)	mm	6 430	6 430	6 430	10 430	Length (A)	mm	3 710	3 870	4 150	4 150	4 900	9 060
Height (B)	mm	1 680	1 680	1 590	1 620	Height (B)	mm	1 010	1 010	1 010	1 010	1 050	1 065
Width	mm	770	770	770	770	Width	mm	545	545	545	545	545	545
Weight	kg	2 810	2 910	3 450	3 410	Weight	kg	1 530	1 590	1 590	1 690	1 660	1 730

* Includes cylinder, piping and pin, excludes boom cyl. Pin

* Includes cylinder, linkage and pin

BUCKET SELECTION GUIDE

Bucket type		Capacity	Cutting width	Tip radius	Weight	Teeth	EC250DL		
							6.0m Boom		
							600mm shoe, 4 950kg counterweight		
L	mm	mm	kg	EA	2.5m	2.97m	3.6m		
Direct fit Buckets	General purpose	560	600	1 623	808	3	C	C	C
		1 140	1 200	1 623	1 119	5	C	C	C
		1 320	1 350	1 623	1 199	5	C	C	C
		1 510	1 500	1 623	1 297	5	C	C	B
		1 690	1 650	1 623	1 379	5	C	B	B
		1 760	1 700	1 623	1 436	6	B	B	A
	Heavy duty	1 010	1 100	1 623	1 140	5	D	D	D
		1 140	1 200	1 623	1 198	5	D	D	D
		1 320	1 350	1 623	1 283	5	D	D	D
		1 510	1 500	1 623	1 369	5	D	C	B
Direct fit Buckets	General purpose	EC300DL		6.2m Boom			600mm shoe, 5 500kg counterweight		
		L	mm	mm	kg	EA	2.55m	3.05m	3.7m
		550	600	1 627	826	3	C	C	C
		1 140	1 200	1 627	1 136	5	C	C	C
		1 320	1 350	1 627	1 215	5	C	C	C
		1 510	1 500	1 627	1 312	5	C	C	B
		1 690	1 650	1 627	1 395	5	C	B	A
		1 760	1 700	1 627	1 453	6	C	B	A
	Heavy duty	1 010	1 100	1 627	1 154	5	D	D	D
		1 140	1 200	1 627	1 211	5	D	D	D
		1 320	1 350	1 627	1 297	5	D	D	C
		1 510	1 500	1 627	1 383	5	D	C	B
		1 690	1 650	1 627	1 469	5	C	B	A

Please consult with your Volvo dealer for the proper match of buckets and attachments to suit the application.

The recommendations are given as a guide only, based on typical operation conditions.

Bucket capacity based on ISO 7451, heaped material with a 1:1 angle of repose.

Maximum material density


A	1200~1300 kg/m ³	Coal, Caliche, Shale
B	1400~1600 kg/m ³	Wet earth and clay, Limestone, Sandstone
C	1700~1800 kg/m ³	Granite, Wet sand, Well blasted rock
D	1900 kg/m ³ ~	Wet mud, Iron ore

MACHINE WEIGHTS AND GROUND PRESSURE

EC250DL	6.0m boom 2.97m arm				999kg (1 340l) bucket 4 250kg counterweight	6.0m boom 2.97m arm			
	Shoe width	Operating weight	Ground pressure	Overall width		Shoe width	Operating weight	Ground pressure	Overall width
Triple grouser	600	25 210	48.6	3 190	600	25 910	50.0	3 190	
	700	25 510	42.2	3 290	700	26 210	43.3	3 290	
	800	25 810	37.3	3 390	800	26 510	38.4	3 390	
	900	26 110	33.6	3 490	900	26 810	34.5	3 490	
Double grouser	700	25 790	42.6	3 290	700	26 490	43.8	3 290	
EC250DLR	10.2m boom 7.85m arm				458kg (520l) bucket 6 200kg counterweight				
EC300DL	6.2m boom 3.05m arm				1 301kg (1 350l) bucket 5 100kg counterweight	6.2m boom 3.05m arm			
Triple grouser	600	27 500	53.1	3 190	HD 600	30 040	58.0	3 190	
	800	28 100	40.7	3 390	700	30 400	50.3	3 290	
	900	28 410	36.5	3 490	800	30 780	44.5	3 390	
EC300DLR	10.2m boom 7.9m arm				478kg (570l) bucket 6 800kg counterweight				
Triple grouser	600	31 380	60.5	3 190	HD 600	31 580	60.9	3 190	
	800	32 320	46.8	3 390	900	31			


SPECIFICATIONS.

WORKING RANGES

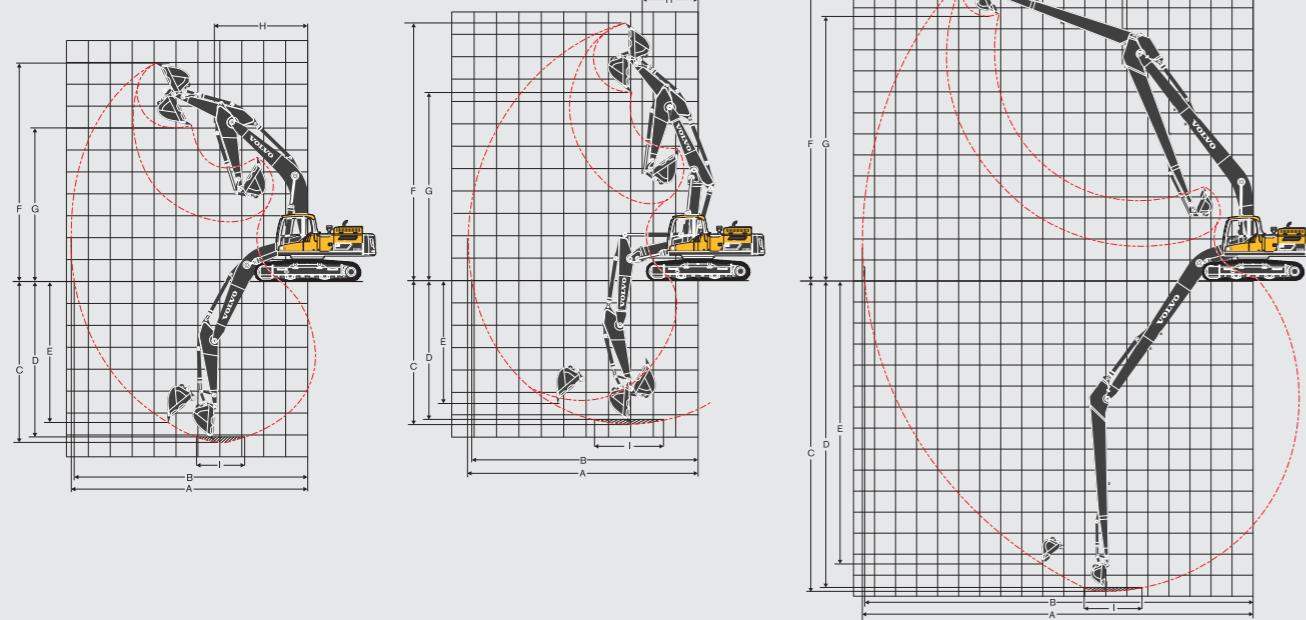

Description			Unit	EC250DL			EC250DLR					
Boom	Arm		m	2.5	6.0 mono	3.6	2.5	5.95 2 piece	3.6	10.2	7.85	
A	Max. digging reach		mm	9 880	10 260	10 730	9 890	10 290	10 780	18 310		
B	Max. digging reach on ground		mm	9 690	10 080	10 560	9 710	10 110	10 610	18 210		
C	Max. digging depth		mm	6 500	6 980	7 600	6 040	6 480	7 050	14 350		
D	Max. digging depth (l = 2440 mm level)		mm	6 280	6 740	7 380	5 930	6 380	6 950	14 230		
E	Max. vertical wall digging depth		mm	5 650	5 930	6 250	5 050	5 450	5 950	12 780		
F	Max. cutting height		mm	9 620	9 690	9 660	11 080	11 340	11 580	14 890		
G	Max. dumping height		mm	6 700	6 800	6 820	8 010	8 270	8 530	12 740		
H	Min. front swing radius		mm	3 910	3 890	3 890	2 790	2 550	2 720	5 720		
Digging forces with direct fit bucket												
Bucket radius			mm	1 537	1 537	1 537	1 537	1 537	1 537	1 537		
Breakout force - bucket	Normal	SAE J1179	kN	152	152	152	152	152	152	68.6		
	Power boost	SAE J1179	kN	166	166	166	166	166	166	-		
	Normal	ISO 6015	kN	171	171	171	171	171	171	77.8		
Tearout force - dipper arm	Normal	SAE J1179	kN	133	115	103	133	115	103	44.1		
	Power boost	SAE J1179	kN	145	125	112	145	125	112	-		
	Normal	ISO 6015	kN	137	118	105	137	118	105	44.7		
Tearout force - dipper arm	Power boost	ISO 6015	kN	149	129	114	149	129	114	-		
	Normal	ISO 6015	kN	149	129	114	149	129	114	44.7		
	Power boost	ISO 6015	kN	178	178	178	178	178	178	178		
Rotation angle, bucket												
Description			Unit	EC300DL			EC300DLR					
Boom	Arm		m	2.55	6.2 mono	3.05	3.7	6.2 2 piece	3.05	3.7	10.2	7.9
A	Max. digging reach		mm	10 190	10 430	10 720	11 320	10 250	10 780	11 400	18 590	
B	Max. digging reach on ground		mm	9 980	10 230	10 520	11 140	10 050	10 590	11 210	18 480	
C	Max. digging depth		mm	6 850	7 050	7 350	8 000	6 210	6 740	7 380	14 750	
D	Max. digging depth (l = 2440 mm level)		mm	6 610	6 840	7 160	7 840	6 110	6 640	7 290	14 650	
E	Max. vertical wall digging depth		mm	5 730	5 890	6 480	7 090	5 210	5 800	6 430	13 490	
F	Max. cutting height		mm	9 660	9 910	10 080	10 360	11 600	12 100	12 600	14 940	
G	Max. dumping height		mm	6 670	6 870	7 040	7 320	8 360	8 850	9 350	12 600	
H	Min. front swing radius		mm	4 220	4 230	4 180	4 240	2 750	2 580	2 770	6 190	
Digging forces with direct fit bucket												
Bucket radius			mm	1 600	1 600	1 600	1 600	1 600	1 600	1 600	1 600	
Breakout force - bucket	Normal	SAE J1179	kN	168	168	168	168	168	168	69.1		
	Power boost	SAE J1179	kN	182	182	182	182	182	182	-		
	Normal	ISO 6015	kN	188	188	188	188	188	188	80.3		
Tearout force - dipper arm	Normal	SAE J1179	kN	157	144	132	115	157	132	115	51.3	
	Power boost	SAE J1179	kN	170	157	143	125	170	143	125	-	
	Normal	ISO 6015	kN	161	148	135	118	161	135	118	51.8	
Rotation angle, bucket												
°			°	179	179	179	179	179	179	179	179	179

DIMENSIONS

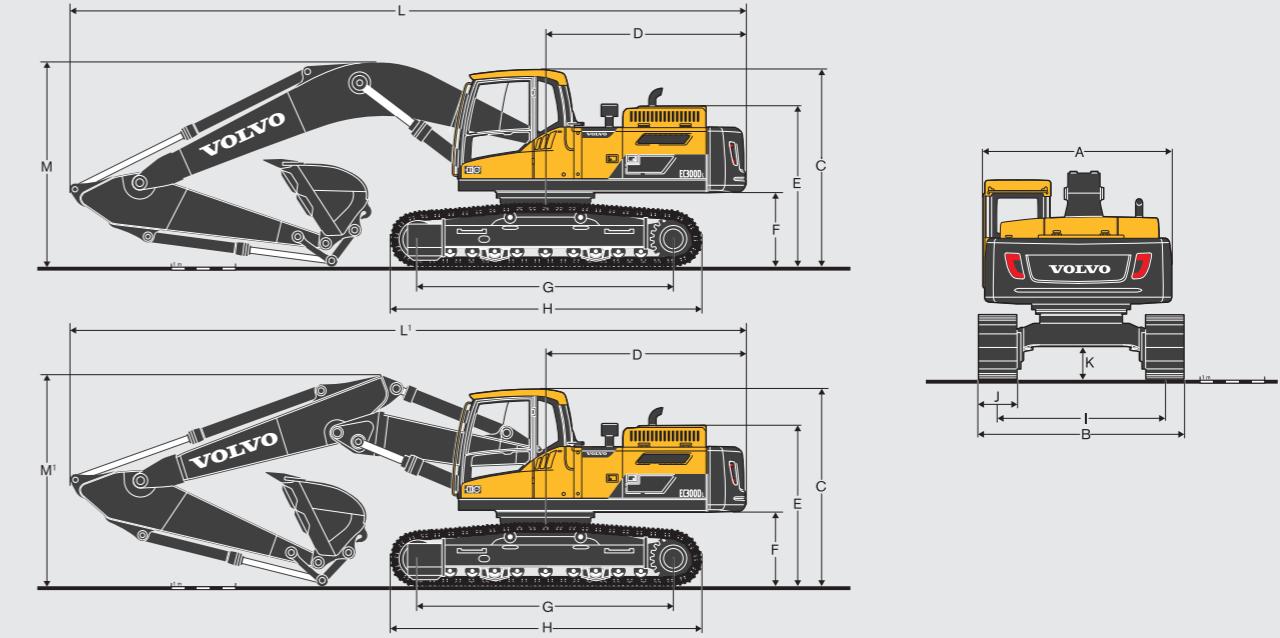

Description			Unit	EC250DL			EC250DLR			Unit	EC300DL			EC300DLR		
Boom	Arm		m	2.5	6.0 mono or 5.95 2 piece	2.97	3.6	10.2	7.85	m	2.55	6.2 mono or 6.2 2 piece	2.75	3.05	10.2	7.9
A	Overall width of upper structure		mm	2 890	2 890	2 890	2 890	2 890	2 890	mm	2 890	2 890	2 890	2 890	2 890	2 890
B	Overall width		mm	3 190	3 190	3 190	3 190	3 190	3 190	mm	3 190	3 190	3 190	3 190	3 190	3 190
C	Overall height of cab		mm	3 020	3 020	3 020	3 020	3 020	3 020	mm	3 090	3 090	3 090	3 090	3 090	3 090
D	Tail slew radius		mm	3 070	3 070	3 070	3 070	3 070	3 070	mm	3 120	3 120	3 120	3 120	3 120	3 120
E	Overall height of engine hood		mm	2 450	2 450	2 450	2 450	2 450	2 450	mm	2 510	2 510	2 510	2 510	2 510	2 510
F	Counterweight clearance *		mm	1 080	1 080	1 080	1 080	1 080	1 080	mm	1 135	1 135	1 135	1 135	1 135	1 135
G	Tumbler length		mm	3 850	3 850	3 850	3 850	3 850	3 850	mm	4 015	4 015	4 015	4 015	4 015	4 015
H	Track length		mm	4 650	4 650	4 650	4 650	4 650	4 650	mm	4 870	4 870	4 870	4 870	4 870	4 870
I	Track gauge		mm	2 590	2 590	2 590	2 590	2 590	2 590	mm	2 590	2 590	2 590	2 590	2 590	2 590
J	Shoe width		mm	600	600	600	600	600	600	mm	600	600	600	600	600	600
K	Min. ground clearance *		mm	470	4											

SPECIFICATIONS.

LIFTING CAPACITY EC250DL

Lifting capacity at the arm end without bucket

For lifting capacity including bucket, simply subtract actual weight of the direct fit bucket or the bucket with quick coupler from the following values.

		Lifting point		1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		Max. reach		
		Along	Across	Along	Across	Along	Across	Along	Across	Along	Across	Along	Across	Along	Across	Along	Across	mm
Boom	6.0m	7.5 m	kg							*6 800	6 660					*6 860	6 440	6 117
Arm	2.5m	6.0 m	kg							*6 820	6 620					*6 860	4 830	7 235
Shoe	600mm	4.5 m	kg					*9 220	*9 220	*7 660	6 370	6 730	4 480			6 150	4 090	7 914
CWT	4 250kg	3.0 m	kg					*11 910	9 180	*8 870	6 040	6 570	4 340			5 640	3 720	8 265
		1.5 m	kg					*14 010	8 610	8 990	5 750	6 410	4 190			5 480	3 590	8 330
		0 m	kg					14 090	8 390	8 790	5 560	6 300	4 090			5 630	3 670	8 116
		-1.5 m	kg			*10 430	*10 430	14 070	8 370	8 720	5 500	6 280	4 070			6 170	4 010	7 600
		-3.0 m	kg			*18 650	17 140	*13 510	8 490	8 800	5 580					7 470	4 810	6 711
		-4.5 m	kg			*14 940	*14 940	*10 890	8 800							*9 050	7 030	5 255

Boom	6.0m	7.5 m	kg											*6 090	5 720	6 629	
Arm	2.97m	6.0 m	kg											*5 830	4 440	7 671	
Shoe	600mm	4.5 m	kg				*8 310	*8 310	*7 120	6 460	*6 590	4 530		5 720	3 810	8 313	
CWT	4 250kg	3.0 m	kg				*11 020	9 380	*8 380	6 120	6 620	4 370		5 280	3 490	8 648	
		1.5 m	kg				*13 380	8 730	9 050	5 790	6 430	4 200		5 130	3 360	8 710	
		0 m	kg				14 110	8 400	8 800	5 570	6 290	4 080		5 240	3 420	8 506	
		-1.5 m	kg	*6 660	*6 660	*10 680	*10 680	14 010	8 320	8 690	5 470	6 240	4 030		5 680	3 690	8 016
		-3.0 m	kg	*12 360	*12 360	*17 770	16 890	*13 960	8 390	8 720	5 500				6 700	4 320	7 179
		-4.5 m	kg				*16 670	*16 670	*11 960	8 630					*8 890	5 920	5 844
Boom	6.0m	7.5 m	kg											*5 080	5 070	7 239	

Boom	8.0m	7.5 m	kg													5 080	5 070	7 239
Arm	3.6m	6.0 m	kg													*4 930	4 060	8 203
Shoe	600mm	4.5 m	kg													*4 990	3 530	8 806
CWT	4 250kg	3.0 m	kg	*15 660	*15 660	*9 780	9 680	*7 700	6 250	6 700	4 440	5 010	3 320		4 900	3 240	9 122	
		1.5 m	kg			*12 410	8 910	*9 070	5 880	6 480	4 250	4 910	3 220		4 760	3 120	9 181	
		0 m	kg	*7 100	*7 100	*14 080	8 440	8 840	5 600	6 310	4 090				4 830	3 150	8 988	
		-1.5 m	kg	*6 850	*6 850	*10 840	*10 840	13 950	8 260	8 660	5 450	6 210	4 000		5 170	3 350	8 526	
		-3.0 m	kg	*11 080	*11 080	*16 030	*16 030	13 960	8 270	8 640	5 420	6 210	4 000		5 940	3 840	7 745	
		-4.5 m	kg	*16 390	*16 390	*18 570	16 950	*12 980	8 440	8 770	5 540				7 730	4 950	6 531	
		-6.0 m	kg					*9 480	8 860						*9 400	8 770	4 533	
B	6.0	7.5	kg													16 260	16 260	6 117

Boom	6.0m	7.5 m	kg					*6 800	*6 800				*6 860	*6 860	6 117			
Arm	2.5m	6.0 m	kg					*6 820	*6 820				*6 860	5 200	7 235			
Shoe	600mm	4.5 m	kg				*9 220	*9 220	*7 660	6 830	*7 030	4 830	6 550	4 420	7 914			
CWT	4 950kg	3.0 m	kg				*11 910	9 870	*8 870	6 500	7 010	4 690	6 020	4 030	8 265			
		1.5 m	kg				*14 010	9 300	9 590	6 210	6 850	4 540	5 860	3 900	8 330			
		0 m	kg				*14 790	9 080	9 380	6 030	6 740	4 440	6 020	3 990	8 116			
		-1.5 m	kg				*10 430	*10 430	*14 590	9 060	9 320	5 970	6 720	4 420	6 600	4 350	7 600	
		-3.0 m	kg				*18 650	18 470	*13 510	9 180	9 400	6 040			7 980	5 210	6 711	
		-4.5 m	kg				*14 940	*14 940	*10 890	9 490					*9050	7 580	5 255	
B	6.0	7.5	kg													10 000	10 000	6 200

Boom	6.0m	7.5 m	kg											*5 080	*5 080	7 239	
Arm	3.6m	6.0 m	kg											*4 930	4 370	8 203	
Shoe	600mm	4.5 m	kg					*6 380	*6 380	*6 020	4 980			*4 990	3 820	8 806	
CWT	4 950kg	3.0 m	kg	*15 660	*15 660	*9 780	*9 780	*7 700	6 710	*6 710	4 790	5 350	3 600	*5 210	3 520	9 122	
		1.5 m	kg			*12 410	9 600	*9 070	6 340	6 920	4 600	5 250	3 500	5 090	3 400	9 181	
		0 m	kg		*7 100	*7 100	*14 080	9 130	9 430	6 060	6 740	4 440		5 180	3 430	8 988	
		-1.5 m	kg	*6 850	*6 850	*10 840	*10 840	*14 680	8 950	9 260	5 910	6 640	4 350		5 540	3 650	8 526
		-3.0 m	kg	*11 080	*11 080	*16 030	*16 030	*14 360	8 950	9 230	5 890	6 650	4 350		6 360	4 170	7 745
		-4.5 m	kg	*16 390	*16 390	*18 570	18 270	*12 980	9 120	9 370	6 010				8 260	5 360	6 531
		-6.0 m	kg					*9 480	*9 480						*9 400	*9 400	4 533

Notes: 1. Machine in "Fine Mode-F" (Power Boost) for lifting capacities. 2. The above loads are in compliance with SAE J1097 and ISO 10567 Hydraulic Excavator Lifting Capacity Standards. 3. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. 4. Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.

LIFTING CAPACITY EC250DL

Lifting capacity at the arm end without bucket.

For lifting capacity including bucket, simply subtract actual weight of the direct fit bucket or the bucket with quick coupler from the following values.

		Lifting point		1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		Max. reach		
		Along	Across	Along	Across	Along	Across	Along	Across	Along	Across	Along	Across	Along	Across	Along	Across	mm
Boom Arm Shoe CWT	6.0m	7.5 m	kg							*6 800	*6 800					*6 860	*6 860	6 117
	2.5m	6.0 m	kg							*6 820	*6 820					*6 860	5 300	7 238
	800mm	4.5 m	kg					*9 220	*9 220	*7 660	6 960	*7 030	4 930			6 700	4 510	7 914
	4 950kg	3.0 m	kg					*11 910	10 070	*8 870	6 640	7 170	4 790			6 160	4 120	8 268
		1.5 m	kg					*14 010	9 500	9 800	6 340	7 000	4 640			5 990	3 990	8 330
		0 m	kg					*14 790	9 280	9 600	6 160	6 890	4 540			6 160	4 080	8 116
		-1.5 m	kg			*10 430	*10 430	*14 590	9 260	9 530	6 100	6 880	4 520			6 750	4 450	7 600
		-3.0 m	kg			*18 650	*18 650	*13 510	9 380	9 620	6 170					8 160	5 330	6 711
		-4.5 m	kg			*14 940	*14 940	*10 890	9 690							*9 050	7 740	5 255

Boom	6.0m	7.5 m	kg										*6 090	*6 090	6 629	
Arm	2.97m	6.0 m	kg										*5 830	4 880	7 671	
Shoe	800mm	4.5 m	kg				*8 310	*8 310	*7 120	7 060	*6 590	4 980	*5 860	4 210	8 313	
CWT	4 950kg	3.0 m	kg				*11 020	10 270	*8 380	6 710	*7 190	4 820	5 770	3 870	8 648	
		1.5 m	kg				*13 380	9 610	*9 630	6 390	7 020	4 650	5 610	3 740	8 710	
		0 m	kg				*14 570	9 280	9 610	6 160	6 890	4 530	5 740	3 800	8 500	
		-1.5 m	kg	*6 660	*6 660	*10 680	*10 680	*14 720	9 200	9 500	6 070	6 830	4 480	6 220	4 100	8 010
		-3.0 m	kg	*12 360	*12 360	*17 770	*17 770	*13 960	9 270	9 530	6 100			7 330	4 800	7 175
Dipper	2.9	-4.5 m	kg				*16 670	*16 670	*11 960	9 510			*8 890	6 530	5 844	
		5.5 m	kg										15 260	15 260	5 844	

Boom	6.0m	7.5 m	kg											*5 080	*5 080	7 233	
Arm	3.6m	6.0 m	kg											*4 930	4 460	8 203	
Shoe	800mm	4.5 m	kg					*6 380	*6 380	*6 020	5 080			*4 990	3 900	8 800	
CWT	4 950kg	3.0 m	kg	*15 660	*15 660	*9 780	*9 780	*7 700	6 840	*6 710	4 890	5 470	3 3680	*5 210	3 600	9 122	
		1.5 m	kg			*12 410	9 790	*9 070	6 470	7 080	4 700	5 370	3 580	5 210	3 480	9 181	
		0 m	kg	*7 100	*7 100	*14 080	9 330	9 650	6 190	6 900	4 540			5 300	3 510	8 988	
		-1.5 m	kg	*6 850	*6 850	*10 840	*10 840	*14 680	9 140	9 480	6 040	6 800	4 450		5 670	3 740	8 526
		-3.0 m	kg	*11 080	*11 080	*16 030	*16 030	*14 360	9 150	9 450	6 020	6 800	4 450		6 510	4 270	7 745
		-4.5 m	kg	*16 390	*16 390	*18 570	*18 570	*12 980	9 320	9 580	6 140				8 450	5 480	6 533
		-6.0 m	kg			*9 480	*9 480							*9 400	*9 400	4 533	

Notes: 1. Machine in "Fine Mode-F" (Power Boost) for lifting capacities. 2. The above loads are in compliance with SAE J1097 and ISO 10567 Hydraulic Excavator Lifting Capacity Standards. 3. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. 4. Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.

LIFTING CAPACITY EC250DLR

Lifting capacity at the arm end without bucket.

For lifting capacity including bucket, simply subtract actual weight of the direct fit bucket or the bucket with quick coupler from the following values.

		Lifting point		6.0 m		7.5 m		9.0 m		10.5 m		12.0 m		13.5 m		15.0 m		Max. reach									
		Along	Across	Along	Across	Along	Across	Along	Across	Along	Across	Along	Across	Along	Across	Along	Across	mm									
Boom	10.2m	13.5 m	kg															*1 080	*1 080	12 44							
Arm	7.85m	12.0 m	kg															*1 020	*1 020	13 70							
Shoe	800mm	10.5 m	kg															*1 760	*1 760	*980	*980 14 70						
CWT	6 200kg	9.0 m	kg															*2 110	*2 110	*1 380	*1 380	*970	*970 15 49				
		7.5 m	kg															*2 340	*2 340	*2 310	2 280	*1 810	1 800	*960	*960 16 100		
		6.0 m	kg															*2 520	*2 520	*2 430	2 190	*2 140	1 750	*980	*980 16 55		
		4.5 m	kg															*2 940	*2 940	*2 730	2 610	*2 580	2 090	*2 440	1 680	*1 000	*1 000 16 85
		3.0 m	kg	*5 420	*5 420	*4 360	*4 360	*3 710	*3 710	*3 280	3 070	*2 980	2 450	*2 760	1 970	2 550	1 600	*1 040	*1 040	17 020							
		1.5 m	kg	*6 630	6 280	*5 110	4 650	*4 210	3 590	*3 630	2 840	*3 230	2 280	*2 940	1 860	2 460	1 520	*1 100	*1 100	17 052							
		0 m	kg	*7 600	5 600	*5 770	4 200	*4 670	3 280	*3 960	2 630	3 400	2 130	2 830	1 750	2 380	1 440	*1 170		1 120	16 950						
		-1.5 m	kg	*8 250	5 160	*6 280	3 870	4 910	3 040	3 950	2 450	3 260	2 000	2 730	1 650	2 320	1 370	*1 270		1 120	16 71						
		-3.0 m	kg	8 420	4 920	6 090	3 660	4 720	2 860	3 810	2 310	3 150	1 900	2 650	1 580	2 260	1 320	*1 410		1 140	16 33						
		-4.5 m	kg	8 300	4 820	5 960	3 540	4 600	2 760	3 710	2 220	3 080	1 830	2 600	1 530	2 240	1 300	*1 590		1 200	15 798						
		-6.0 m	kg	8 300	4 810	5 910	3 500	4 550	2 710	3 670	2 180	3 050	1 800	2 590	1 510	*2 040	1 300	*1 840		1 290	15 09						
		-7.5 m	kg	8 370	4 880	5 940	3 520	4 560	2 720	3 670	2 180	3 050	1 810	2 610	1 540				*2 210		1 440	14 20					
		-9.0 m	kg	*7 900	5 020	6 040	3 610	4 630	2 780	3 730	2 240	3 110	1 860							2 790		1 670	13 07				
		-10.5 m	kg	*7 140	5 230	*5 790	3 760	4 760	2 900	3 840	2 350										3 370		2 060	11 63			
		-12.0 m	kg	*6 000	5 530	*4 870	3 990	*3 960	3 100												*3 520		2 790	9 76			

Notes: 1. Machine in "Fine Mode-F" (Power Boost) for lifting capacities. 2. The above loads are in compliance with SAE J1097 and ISO 10567 Hydraulic Excavator Lifting Capacity Standards. 3. Rated loads do not exceed 87% of hydraulic lifting capacity or 75% of tipping load. 4. Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.

SPECIFICATIONS.

LIFTING CAPACITY EC300DL

Lifting capacity at the arm end without bucket.

For lifting capacity including bucket, simply subtract actual weight of the direct fit bucket or the bucket with quick coupler from the following values.

		Lifting point		1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		Max. reach		
		Along	Across	Along	Across	Along	Across	Along	Across	Along	Across	Along	Across	Along	Across	mm		
Boom	6.2m	7.5 m	kg			*7 600	*7 600			*7 740	6 910	6 528						
	Arm	2.55m	6.0 m	kg				*7 920	7 880	*7 700	5 380			*7 710	5 300	7 558		
	Shoe	600mm	4.5 m	kg		*11 200	*11 200	*8 990	7 490	*8 000	5 250			7 150	4 520	8 185		
	CWT	5 100kg	3.0 m	kg		*14 260	10 630	*10 370	7 020	8 050	5 030			6 590	4 120	8 500		
		1.5 m	kg			*16 330	9 920	11 030	6 630	7 820	4 820			6 420	3 980	8 540		
		0 m	kg			*16 890	9 690	10 760	6 400	7 670	4 690			6 600	4 070	8 308		
		-1.5 m	kg			*12 830	*12 830	*16 440	9 690	10 680	6 330	7 640	4 660		7 260	4 450	7 779	
		-3.0 m	kg			*20 420	20 150	*15 070	9 860	10 800	6 430			8 790	5 350	6 883		
		-4.5 m	kg			*16 190	*16 190	*12 070	10 260					*9 720	7 780	5 437		
Boom	6.2m	7.5 m	kg											*6 300	5 840	7 210		
	Arm	3.05m	6.0 m	kg										*6 030	4 640	8 152		
	Shoe	600mm	4.5 m	kg										*6 010	4 010	8 736		
	CWT	5 100kg	3.0 m	kg										5 930	3 680	9 032		
		1.5 m	kg											5 790	3 560	9 069		
		0 m	kg											5 930	3 620	8 851		
		-1.5 m	kg											6 420	3 910	8 357		
		-3.0 m	kg											7 550	4 580	7 532		
Boom	6.2m	7.5 m	kg											*9 020	6 180	6 243		
	Arm	3.05m	6.0 m	kg														
	Shoe	600mm	4.5 m	kg														
	CWT	5 100kg	3.0 m	kg														
		1.5 m	kg															
		0 m	kg															
		-1.5 m	kg															
		-3.0 m	kg															
Boom	6.2m	7.5 m	kg											*4 950	*4 950	7 964		
	Arm	3.7m	6.0 m	kg										*6 250	5 580	8 824		
	Shoe	600mm	4.5 m	kg										*4 760	4 110	8 824		
	CWT	5 100kg	3.0 m	kg										*7 420	*7 420	*8 950	5 380	
		1.5 m	kg											*8 950	7 240	*7 620	5 040	
		0 m	kg											*4 750	3 600	9 365		
		-1.5 m	kg											*4 880	3 330	9 642		
		-3.0 m	kg											*5 190	3 210	9 676		
Boom	6.2m	7.5 m	kg											*6 750	*6 750	*16 180	9 680	
	Arm	3.7m	6.0 m	kg										*10 460	6 740	7 850	4 830	
	Shoe	600mm	4.5 m	kg										*5 890	3 630	9 363		
	CWT	5 100kg	3.0 m	kg										*3 770	*4 880	3 330	9 642	
		1.5 m	kg											*5 190	3 210	9 676		
		0 m	kg											*5 340	3 250	9 473		
		-1.5 m	kg											*5 720	3 470	9 013		
		-3.0 m	kg											*6 520	3 950	8 256		
Boom	6.2m	7.5 m	kg											*8 280	5 010	7 102		
	Arm	3.7m	6.0 m	kg										*10 660	*10 660	*16 610	*16 130	
	Shoe	600mm	4.5 m	kg										*10 600	*11 600	*16 610	*16 130	
	CWT	5 100kg	3.0 m	kg										*10 600	*11 600	*16 610	*16 130	
		1.5 m	kg											*10 600	*11 600	*16 610	*16 130	
		0 m	kg											*10 600	*11 600	*16 610	*16 130	
		-1.5 m	kg											*10 600	*11 600	*16 610	*16 130	
		-3.0 m	kg											*10 600	*11 600	*16 610	*16 130	
Boom	6.2m	7.5 m	kg											*15 040	*15 040	*10 660	*10 660	
	Arm	3.7m	6.0 m	kg														
	Shoe	600mm	4.5 m	kg														
	CWT	5 100kg	3.0 m	kg														
		1.5 m	kg															
		0 m	kg															
		-1.5 m	kg															
		-3.0 m	kg															
Boom	6.2m	7.5 m	kg											*7 600	*7 600	*7 740	6 910	
	Arm	3.05m	6.0 m	kg										*7 920	*7 920	*7 710	5 300	
	Shoe	600mm	4.5 m	kg										*8 990	7 760	*8 000	5 450	
	CWT	5 100kg	3.0 m	kg			</td											

EQUIPMENT.

STANDARD EQUIPMENT

	EC250D	EC300D
Engine		
Turbocharged, 4 stroke diesel engine with water cooling, direct injection and charged air cooler	•	•
Air filter with indicator	•	•
Air intake heater	•	•
Cyclone pre-cleaner	•	•
Fuel filter and water separator	•	•
Alternator, 80 A	•	•
Electric/Electronic control system		
Contronics		
Advanced mode control system	•	•
Self-diagnostic system	•	•
Caretrack and 3yr-Caretrack subscription	•	•
Machine status indication	•	•
Engine speed sensing power control	•	•
Automatic idling system	•	•
One-touch power boost	•	•
Safety stop/start function	•	•
Adjustable LCD color monitor	•	•
Master electrical disconnect switch	•	•
Engine restart prevention circuit	•	•
High-capacity halogen lights:		
Frame-mounted 2	•	•
Boom-mounted 2	•	•
Batteries, 2 x 12 V / 200 Ah	•	•
Start motor, 24 V / 5.5 kW	•	•
Hydraulic system		
Automatic sensing hydraulic system		
Summation system	•	•
Boom priority	•	•
Arm priority	•	•
Swing priority	•	•
ECO mode fuel saving technology	•	•
Boom, arm and bucket regeneration valves	•	•
Swing anti-rebound valves	•	•
Boom and arm holding valves	•	•
Multi-stage filtering system	•	•
Cylinder cushioning	•	•
Cylinder contamination seals	•	•
Auxiliary hydraulic valve	•	•
Automatic two-speed travel motors	•	•
Hydraulic oil, ISO VG 46	•	•
Frame		
Access way with handrail	•	•
Tool storage area	•	•
Punched metal antislip plates	•	•
Undercover	•	•
Cab and Interior		
Travel pedals and hand levers	•	•
Adjustable operator seat and joystick control console	•	•
Control joysticks	•	•
Heater & air-conditioner, automatic	•	•
Flexible antenna	•	•
AM/FM stereo with CD player, MP3 and USB input	•	•

Cab and Interior

	EC250D	EC300D
Control lock-out lever	•	•
Cab, all-weather sound suppressed, includes:		
Cup holders	•	•
Door locks	•	•
Tinted glass	•	•
Floor mat	•	•
Horn	•	•
Large storage area	•	•
Pull-up type front window	•	•
Removable lower windshield	•	•
Seat belt	•	•
Safety glass	•	•
Windshield wiper with intermittent feature	•	•
Master key	•	•
Sun screens, front, roof, rear	•	•
Undercarriage		
Undercover	•	•
Hydraulic track adjusters	•	•
Greased and sealed track link	•	•
Track Guard	•	•
Digging equipment		
Linkage	•	•

OPTIONAL EQUIPMENT

	EC250D	EC300D
Hydraulic system		
Hydraulic piping:		
Breaker & shear: variable flow and pressure pre-setting	•	•
Additional return filter	•	•
Slope & rotator	•	•
Grapple	•	•
Oil leak (drain) line	•	•
Quick coupler piping	•	•
Volvo hydraulic quick coupler S1	•	
Volvo hydraulic quick coupler S2	•	•
Volvo hydraulic quick coupler S2 narrow	•	
Volvo hydraulic quick coupler U24, ROC-OC, ED24	•	
Volvo hydraulic quick coupler U29, U29 wide, ROC-OC, ED29		•
Hydraulic oil, ISO VG 32, 68	•	•
Hydraulic oil, longlife oil 32, 46, 68	•	•
Cab and Interior		
Silicon oil and rubber mounts with spring	•	•
ROPS (ISO12117-2) certified cab	•	•
Fabric seat with heater	•	•
Fabric seat with heater and air suspension	•	•
Opening top hatch	•	•
Cab-mounted falling object guard (FOG)	•	•
Cab-mounted falling object protective structure (FOPS)	•	•
Smoker kit (Ashtray and lighter)	•	•
Safety net for front window	•	•
Front rain shield	•	•
Sun shield, roof hatch (steel)	•	•
Lower wiper with intermittent control	•	•
Anti-vandalism kit	•	•
Rear view camera	•	•
Specific key	•	•
Undercarriage		
Full track guard	•	•
Track shoes		
600/700/800/900 mm with triple grousers	•	•
Track shoes 600 mm HD with triple grousers	•	•
Track shoes 700 mm with double grousers	•	•
Frame		
Rear view mirror on counterweight	•	•
Full height counterweight:		
4 250kg, 4 950kg	•	
6 200kg for long reach	•	
5 100kg, 5 500kg		•
6 800kg for long reach		•
Digging equipment		
Boom: 6.0 m monoblock, 5.95 m 2 piece boom	•	
Boom: 10.2 m long reach	•	
Arm: 2.5 m, 2.97 m, 3.6 m	•	
Arm: 7.85 m, long reach	•	
Boom: 6.2 m monoblock, 6.2 m 2 piece boom	•	
Boom: 10.2 m, long reach	•	
Arm: 2.55 m, 2.75 m, 3.05 m, 3.7 m	•	
Arm: 7.9 m long reach	•	
Service		
Tool kit, daily maintenance	•	•
Tool kit, full scale	•	•

SELECTION OF VOLVO OPTIONAL EQUIPMENT





BIG ENOUGH TO TRUST SMALL ENOUGH TO CARE

Founded in 1974 CJD are in the industry for the long term and have the skills and knowledge to support you and your equipment. CJD Equipment takes great pride in being Volvo CE's first and only authorised partner in Australia for over 25 years. Together, we provide a full range of machinery ideally suited to Australia's unique landscapes and industry requirements. These products are fully supported through a nationwide network of branches, and carefully selected dealers and service agents, strategically positioned to ensure total support.

With fully equipped workshops and parts warehouses in every capital city, and dealers throughout major regional towns, we have the support network in place to ensure you're well supported, no matter where you or your machines are. Ongoing in-house training programs ensures our technicians' skills keep pace with the latest technology and product advances.

Head Office

54 Great Eastern Highway
South Guildford, WA 6055

Visit www.cjd.com.au

Call 1300 139 804

Email marketing@cjd.com.au

[Facebook.com/cjdequipment](#)

[Linkedin.com/company/cjd-equipment](#)

[Instagram.com/cjd_equipment](#)

